




40SG



Fuse-links 40SG
 Miniature Ceramic Fuse
 TIME-LAG(Slow Blow)
 T-350Vac

pluggable into micro clip of SL001 or directly mountable on printed circuit boards

Standards and approvals
 UL(Recognized) 248-14

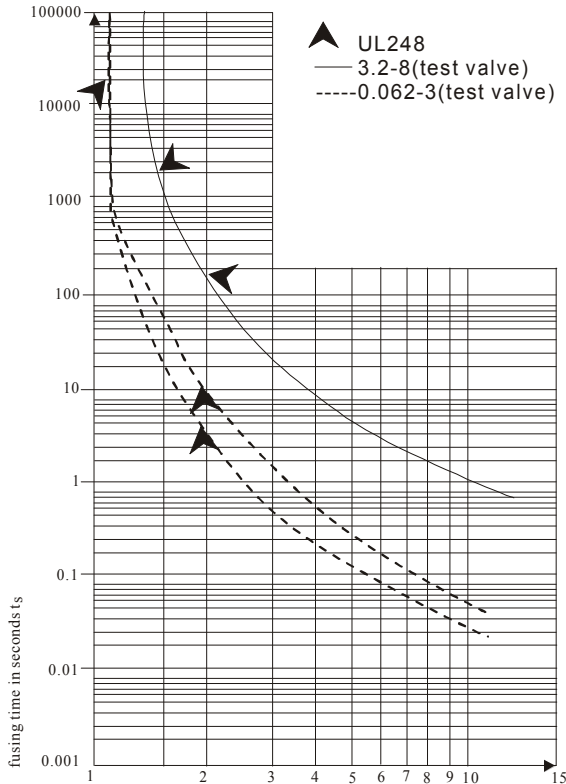

TYPE DIMENSION

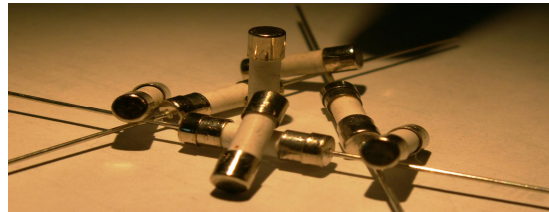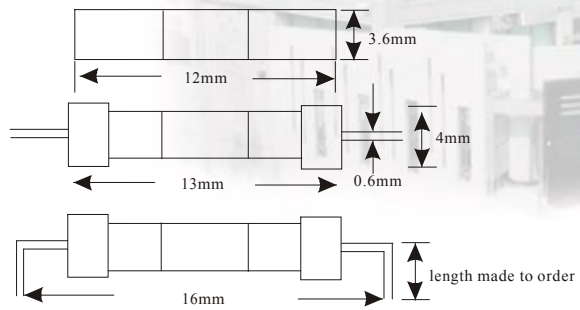

Time current characteristics

Rat. current In	1.1xIn		1.5xIn		2.0xIn	
	min.	max.	max.	max.	max.	max.
≤3A	4h			10min	5s	120s
>3A	4h				12s	120s

Order No.
 Type:40SG

TYPE	LEAD WIRE	FORMING PITCH, LENGTH	RATED CURRENT	RATED VOLTAGE	VOLTAGE DROP mV AT In	Fusing I ² t at 10 x In min A ² s	BREAKING CAPACITY	APPROVAL	
								eUL	UL
40SG		P:xx, L:xx	100mA	350Vac	600	2.5x10 ⁻²	350Vac 50A.	●	●
			125mA		550	4.4x10 ⁻²		●	●
			150mA		523	5.0x10 ⁻²		●	●
			160mA		480	5.8x10 ⁻²		●	●
			180mA		435	6.9x10 ⁻²		●	●
			200mA		390	1.0x10 ⁻¹		●	●
			250mA		350	1.7x10 ⁻¹		●	●
			300mA		325	2.1x10 ⁻¹		●	●
			315mA		300	2.6x10 ⁻¹		●	●
			400mA		250	3.2x10 ⁻¹		●	●
			500mA		220	6.0x10 ⁻¹		●	●
			600mA		210	7.5x10 ⁻¹		●	●
			700mA		190	8.2x10 ⁻¹		●	●
			750mA		170	9.4x10 ⁻¹		●	●
			800mA		160	9.8x10 ⁻¹		●	●
			1 A		155	2.8x10 ⁰		●	●
			1.2 A		150	2.6x10 ⁰		●	●
			1.25 A		145	3.8x10 ⁰		●	●
			1.5 A		132	4.1x10 ⁰		●	●
			1.6 A		130	4.5x10 ⁰		●	●
			1.8 A		128	5.8x10 ⁰		●	●
			2 A		125	7.5x10 ⁰		●	●
			2.25 A		123	1.1x10 ¹		●	●
			2.5 A		120	1.4x10 ¹		●	●
2.8 A	118	1.6x10 ¹	●	●					
3 A	115	2.0x10 ¹	●	●					
3.15 A	110	2.2x10 ¹	●	●					
4 A	100	3.6x10 ¹	●	●					
5 A	95	5.9x10 ¹	●	●					
6 A	90	1.1x10 ²	●	●					
8 A			●	●					
10 A			●	●					