




51FG



Fuse-links 51FG
 Miniature Glass Fuse 5x20mm
 High Breaking Capacity
 Fast Blow (Quick Acting)
 T-250V

pluggable into miniature fuse-holder or directly mountable on printed circuit boards

Standards and approvals
 IEC-127-2 DIN-VDE 0820/1

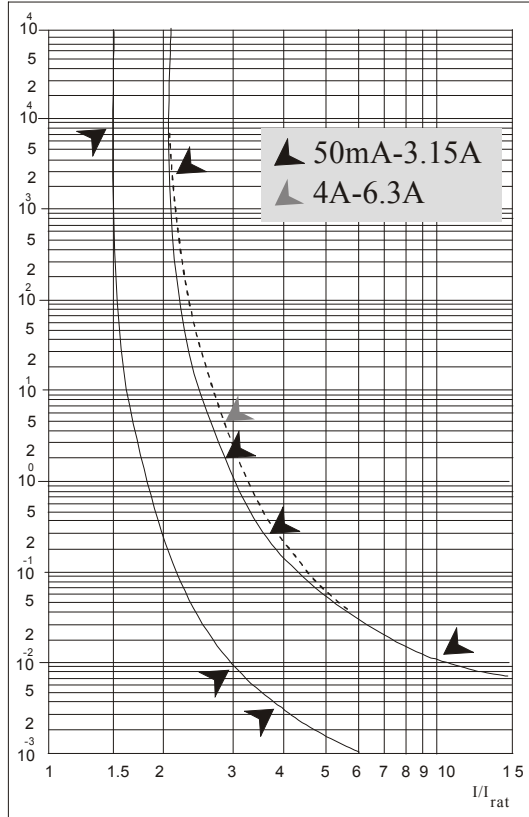

TYPE DIMENSION

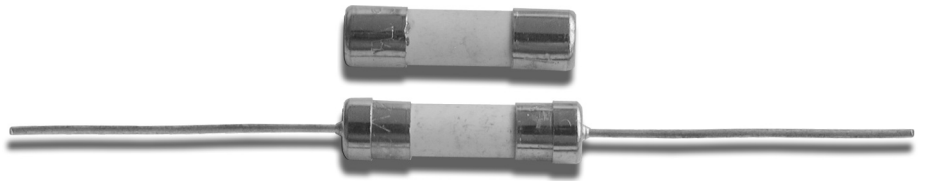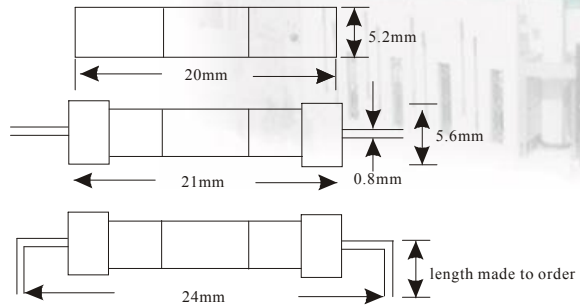

Time current characteristics

Rat. current I _n	nxI _n				
	1.5xI _{rat}	2.1xI _{rat}	2.75xI _{rat}	4xI _{rat}	10xI _{rat}
50mA...3.15A	>1h	<30min	10ms...2s	3...300ms	<20ms
4A...6.3A	>30min	<30min	10ms...3s	3...300ms	<20ms
8A...20A	>30min	<30min	10ms...3s	3...300ms	<20ms

Order No.
 Type:51FG

TYPE	LEAD WIRE	PITCH, LENGTH	RATED CURRENT	VOLTAGE DROP mV 1.0xI _n MAX SLEEK	POWER DISSIPATION MAX. AT 1.5I _n W SLEEK	FUSING I ² T at 10xI _n A ² S	BREAKING CAPACITY	APPROVAL	
								CSA	UL
51FG	L	P:xx, L:xx	125	2000	0.5	2.5x10 ⁻²	250VAC 1500A	●	●
			160	1550	0.6	3.5x10 ⁻²		●	●
			200	1300	0.6	8.4x10 ⁻²		●	●
			250	1000	0.7	1.1x10 ⁻¹		●	●
			315	900	0.8	1.9x10 ⁻¹		●	●
			400	800	0.9	3.4x10 ⁻¹		●	●
			500	650	1.0	5.6x10 ⁻¹		●	●
			630	550	1.1	7.7x10 ⁻¹		●	●
			800	450	1.2	1.6x10 ⁰		●	●
			1	250	1.4	1.0x10 ⁰		●	●
			1.25	170	1.5	1.6x10 ⁰		●	●
			1.6	160	1.7	2.6x10 ⁰		●	●
			2	150	1.9	4.5x10 ⁰		●	●
			2.5	120	2.1	1.0x10 ¹		●	●
			3.15	110	2.4	1.5x10 ¹		●	●
			4	100	2.7	3.2x10 ¹		●	●
			5	95	3.0	6.6x10 ¹		●	●
			6.3	90	3.4	1.1x10 ²		●	●
			8	90	3.6	2.5x10 ²		●	●
			10	90	4.0	3.0x10 ²		●	●
12				●	●				
13				●	●				
15				●	●				
16				●	●				
18				●	●				
20				●	●				